


Panel Lamp Installation Termination Instructions

FLATLITE electroluminescent lamps are simple to cut to length and terminate in the field. You will need the following tools and materials:

- ◆ Coil of lamp
- ◆ Pair of scissors, or paper cutter
- ◆ 500psi manual or automatic press
- ◆ FLATLITE Pre-terminated Leads (FLL-9999E-12)
- ◆ Connector Sealing Tape (FLT-0075W-3)
- ◆ Edge Sealing Tape (FLT-0050C-3)

Carefully read and follow these instructions:

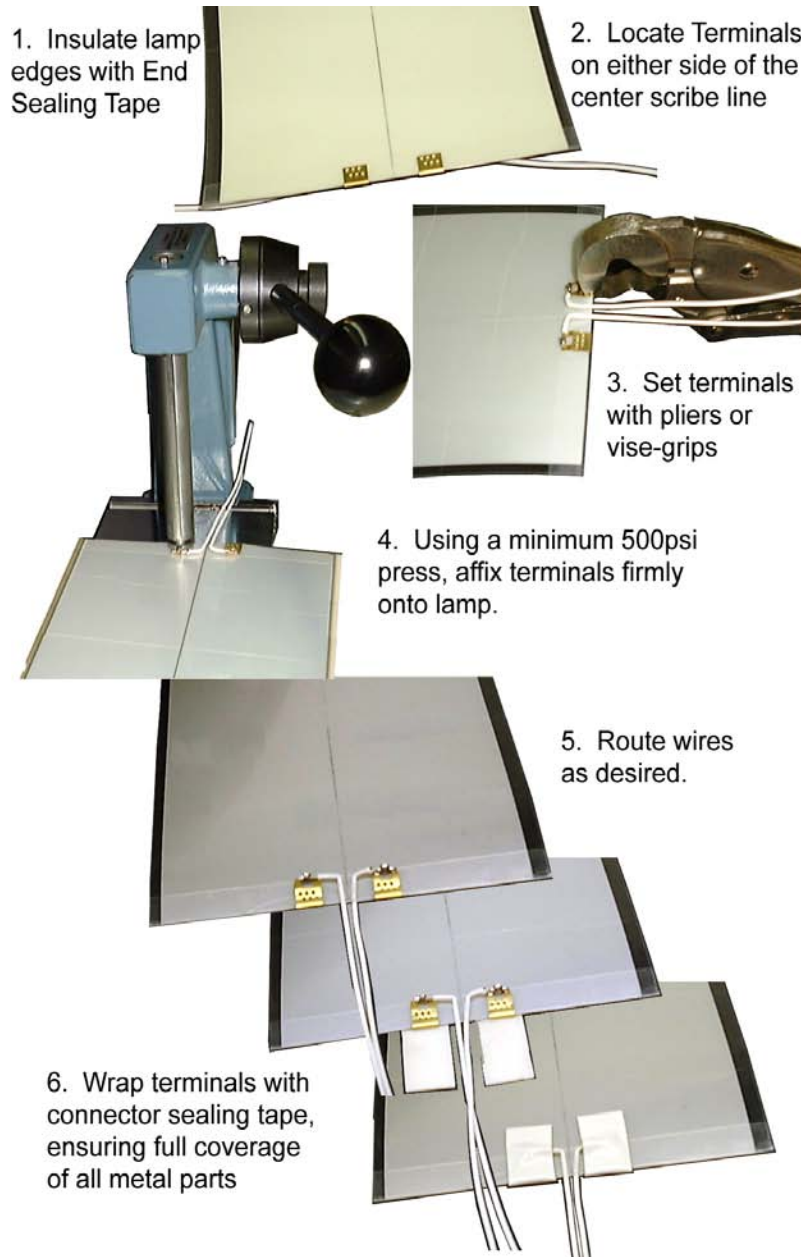

Important:

Use one pair of connectors for every 5000 sq. inches of lamp area. For example: a 12,500 sq. inch lamp should have 6 connectors: 3 on each side of the scribe line.

An extreme shock hazard exists until the lamp edges are sealed and the connector is insulated. Never attach an incomplete lamp to a power supply.

FLATLITE lamps are designed for use exclusively with E-Lite manufactured power supplies. Use of third party power supplies can cause damage to the lamp, and could create an unsafe condition.

