




# GINGER D / GINGER 400

*High power LED fixtures recessed  
installations into drywall / wood panels.*


**GINGER** is a line of spotlights affording a small and slick design and leading-edge technology. The series of spots includes both recessed and freestanding fixtures. **GINGER 400** is a new line of spotlights with higher light output of 460lm thanks to Luxeon 5050 Led. Options for serial or parallel connection (24V)

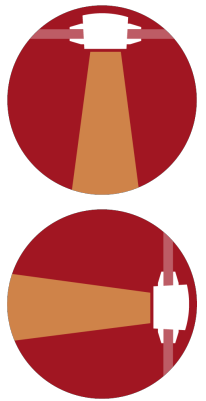

Although **GINGER** is small in size (only 74mm), it affords a mighty light output of 240lm, thanks to the new Luxeon TX LED. Furthermore, **GINGER**'s dark-light design ensures a pure light without glare.


**GINGER** has a smart design, incorporating a unique cooling method, and a concealed cable PG, to provide a slim cutout where its anodized color lends the final touch of an artist.

**GINGER D** is for either outdoor or indoor recessed installations into drywall or wood panels. This line is ideal for illuminating facades and niches, spas and pool areas, landscape lighting and scenery, counters and shelves, indoor and outdoor use, at home and/or in the office.


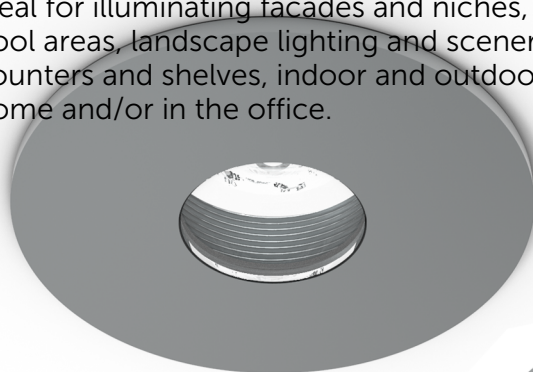


		<b>CRI</b>		<b>lm</b>	<b>lm/w</b>				
Ø50mm	IP67	Min 90	MAX. 4.2W	MAX. 460lm	131 lm/w	11° ~50° /OV	2200 ~ 5700K	R / G / B	RAL / Anodize


<b>OUTPUT</b>	<b>GINGER D</b>	<b>GINGER D 400</b>
LED System	Luxeon TX	Luxeon 5050
Intensity	240 lm @ full power CRI 95 3000K	460 lm @ full power CRI 90 3000K
Channel Range	1 Channel	1 Channel
Color Range	2200 / 2700K / 3000K / 3500K / 4000K / 5000K / 5700K	2200 / 2700K / 3000K / 3500K / 4000K / 5000K / 5700K / COLORS
Optical System	11° / 15° / 28° / 44° / Oval 12 * 52°	16° / 28° / 49° / OV
<b>ELECTRICAL</b>		
Control	Constant current driver / 24V with Mini CC2CB	Constant current driver / 24V with Mini CC2CB
Input Voltage	3V @ 700mA / 24V with Mini CC2CV	6V @ 700mA / 24V with Mini CC2CV
Consumption	2W @ 700mA, 3W @1050mA	4.2W @ 700mA
Max LED's	1 LED's	1 LED
Efficiency LM/W	121lm/w	137lm/w
Connection	22AWG 2C concealed cable PG	22AWG 2C, Concealed cable PG
<b>ENVIRONMENTAL</b>		
IP Rating	IP 67	IP 67
Working Temp.	-18°C ~ 40°C / 0°F ~ 104°F	-18°C ~ 40°C / 0°F ~ 104°F
Storage Temp.	-18°C ~ 60°C / 0°F ~ 140°F	-18°C ~ 60°C / 0°F ~ 140°F
<b>PHYSICAL</b>		
Size	H65 * Ø61mm	H65 * Ø61mm
Housing	Anodize Aluminum	Anodize Aluminum

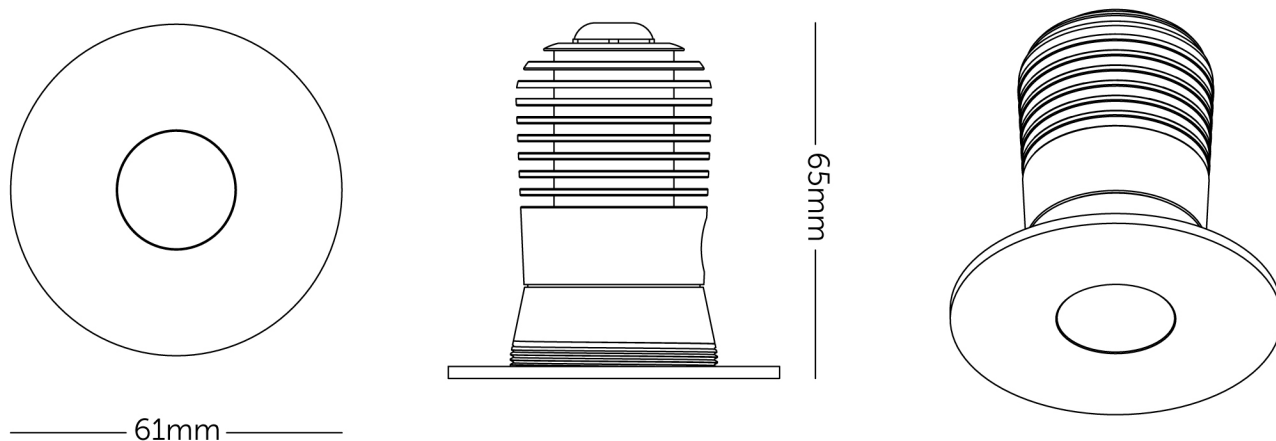


**BRACKETS**

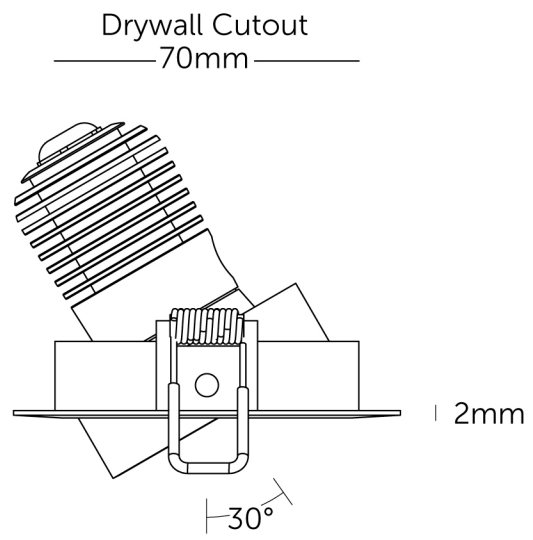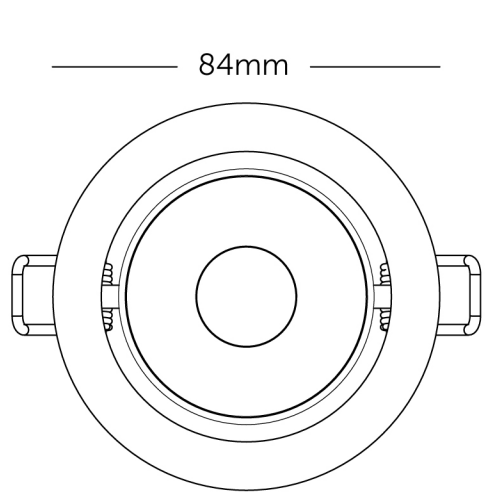


**ACCESSORIES**



**Honeycomb**

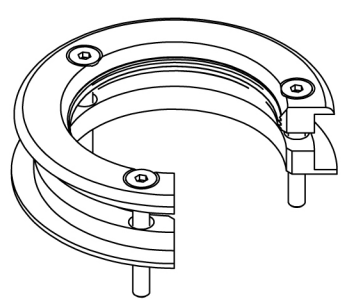

**Double Bracket**

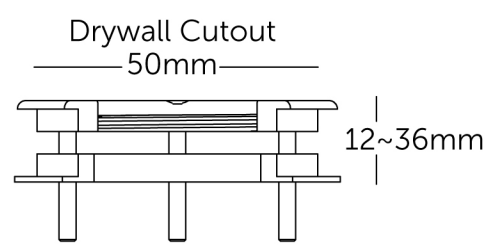

**PINOUT**

