

# GINGER XL-D


*Big size recessed spotlight for installations into drywall / wood panels.*

	<b>CRI</b>		<b>lm</b>	<b>lm/w</b>					
IP 67	70-90	8.4W	792lm	95lm/w	20/28/37/ OV	2700K ~ 6500K	Mono / RGBW	RAL / Anodize	55mm

**GINGER XL** is a line of spotlights design with a leading-edge technology. The series of spots includes various installation options with custom design mounting system. The light output of the unit ranges from 660 to 1130 Lumen thanks to the Luxeon M LED. Furthermore, the unit dark-light design ensures a pure light without glare.

**GINGER XL** has a smart design, incorporating a unique cooling method, and a concealed cable PG, to provide a slim cutout where its anodized color lends the final touch of an artist. The **GINGER XL** is also optional in RGBW.

**Ginger XL D** is a bigger size recessed spotlight for installations into drywall or wood panels. This line is ideal for illuminating facades and niches, spas and pool areas, landscape lighting and scenery, counters and shelves, indoor and outdoor use, at home and/or in the office.

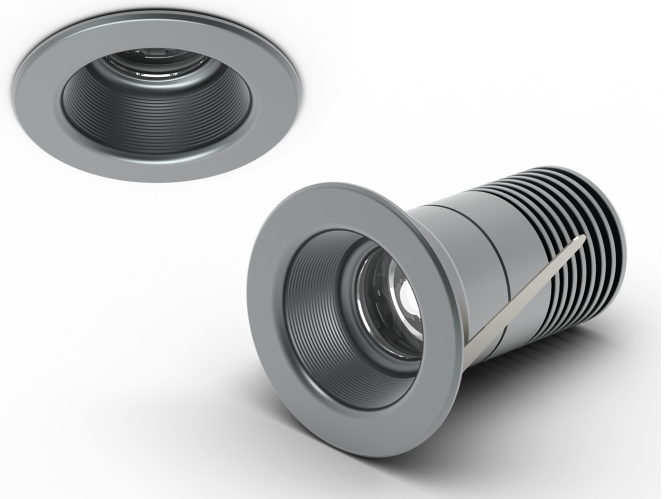

**OUTPUT**

LED System	OSRAM Multi Color LED or Luxeon M white
Intensity	792 lumens @ full power CRI 80 4000K
Channel Range	1 / 4 Channels
Color Range	2700K / 3000K / 3500K / 4000K / 5000K / 5700K / 6500K / RGBW
Optical System	20 / 28 / 37 / OVAL 48X20 FOR WHITE 28 / 37 / OVAL FOR RGBW(4000K)

**ENVIRONMENTAL**


Control	Constant current driver / 24V with Mini CC2CB
Input Voltage	6V/1400mA & 12V/700mA
Consumption	8.4W
Max LED's	1 LED
Efficiency LM/W	95lm/w @ 4000K 80CRI @ 700mA
Connection	22AWG 2C concealed cable PG

**PHYSICAL**

IP Rating	IP 67
Working Temp.	-18°C ~ 40°C / 0°F ~ 104°F
Storage Temp.	-18°C ~ 60°C / 0°F ~ +140°F

**PHYSICAL**

Size	H96 * Ø70mm
Housing	Anodize Aluminum

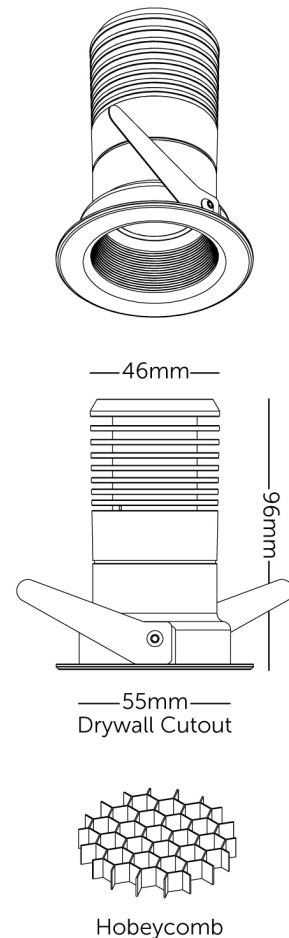

**TECHNICAL SPECIFICATION**